



LED Traffic Cabinet Light

GREEN Technology

CL Series

The Leotek LED Advantage

Bright white LEDs uniformly light the cabinet interior, and are easily installed to the top or sides of the chassis, or below shelves.





Features and Benefits

- Environmentally friendly
- Significant energy and maintenance savings
- Remains cooler than standard tube lighting
- Excellent moisture and dust resistance
- Maintains 70% of the initial lumen intensity after 50,000 hours of operation
- 5-Year Limited Warranty

Technical Specifications

Operating Temperature: -40°F to 140°F (-40°C to 60°C)	LED Color Temperature: Cool White 5000K
Operating Voltage: 24Vdc	LED Quantity: 12 per foot

Mechanical Dimensions [in(mm)]

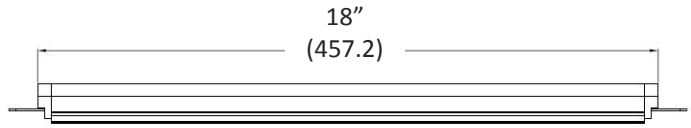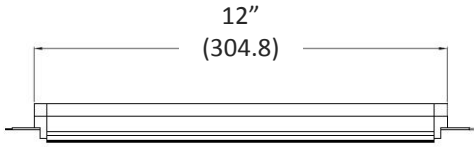

Height: 0.89"(22.7mm) | Width: 0.74" (18.8mm)

Ordering Options

Model Number and Description	Length	Wattage (Typical Power Consumption)	Wattage (Maximum Power Provided)	Input Voltage
TSL-CL-12-DC LED Cabinet Light ¹	12"	4.8		24Vdc
TSL-CL-18-DC LED Cabinet Light ¹	18"	7.2		24Vdc
LP1025-24-CV Power Supply ² (Provides power for up to five feet of light.)	3-1/8in (L) x 3-1/16in (W) x 1 (H) / 80mm (L) x 78mm (W) x 26mm (H)		25	90-264Vac
CLP-090B Power Supply ² (Provides power for up to nineteen feet of light.)	7-5/8in (L) x 2-3/8in (W) x 1-7/16 (H) / 193mm (L) x 60mm (W) x 44mm (H)		96	90-264Vac

¹CL Cabinet Light requires 24Vdc input.

²Leotek power supplies are constant voltage source type.

LEOTEK USA
1330 Memorex Drive
Santa Clara, CA 95050
Toll Free: (888) 806-1188
Fax: (408) 980-0538

LEOTEK TAIWAN
No. 50 Lung-Yuan 7th Road
Lung-Tan, Tao-Yuan Hsien 325
Taiwan
Telephone: 886-3-4995939
Fax: 886-3-4995930

www.leotek.com
www.liteon.com

