



# LED Traffic Cabinet Light

**GREEN** Technology

**CL Series**

## The Leotek LED Advantage

Bright white LEDs uniformly light the cabinet interior, and are easily installed to the top or sides of the chassis, or below shelves.





## Features and Benefits

- Environmentally friendly
- Significant energy and maintenance savings
- Remains cooler than standard tube lighting
- Excellent moisture and dust resistance
- Engineered aluminum heat sink for optimum thermal management
- Maintains 70% of the initial lumen intensity after 50,000 hours of operation
- 5-Year Limited Warranty

## Technical Specifications

Operating Temperature: : -40°F to 140°F (-40°C to 60°C)	LED Color Temperature: : Cool White 5000K
Operating Voltage: : 24Vdc	LED Quantity: : 12 per foot

# Mechanical Dimensions [in(mm)]

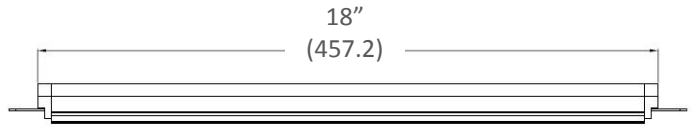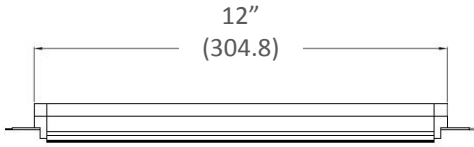

Height: 0.89"(22.7mm) | Width: 0.74" (18.8mm)

## Ordering Options

Model Number and Description	Length	Wattage (Typical Power Consumption)	Wattage (Maximum Power Provided)	Input Voltage
TSL-CL-12-DC LED Cabinet Light <sup>1</sup>	12"	4.8		24Vdc
TSL-CL-18-DC LED Cabinet Light <sup>1</sup>	18"	7.2		24Vdc
LP1025-24-CV Power Supply <sup>2</sup> (Provides power for up to five feet of light.)	3-1/8in (L) x 3-1/16in (W) x 1 (H) / 80mm (L) x 78mm (W) x 26mm (H)		25	90-264Vac
CLP-090B Power Supply <sup>2</sup> (Provides power for up to nineteen feet of light.)	7-5/8in (L) x 2-3/8in (W) x 1-7/16 (H) / 193mm (L) x 60mm (W) x 44mm (H)		96	90-264Vac

<sup>1</sup>CL Cabinet Light requires 24Vdc input.

<sup>2</sup>Leotek power supplies are constant voltage source type.

**LEOTEK USA**  
1330 Memorex Drive  
Santa Clara, CA 95050  
Toll Free: (888) 806-1188  
Fax: (408) 980-0538

**LEOTEK TAIWAN**  
No. 50 Lung-Yuan 7<sup>th</sup> Road  
Lung-Tan, Tao-Yuan Hsien 325  
Taiwan  
Telephone: 886-3-4995939  
Fax: 886-3-4995930

[www.leotek.com](http://www.leotek.com)  
[www.liteon.com](http://www.liteon.com)

