




"The Leader in Electro-Optics Technology"

a subsidiary company of LITEON[®]

LED GREEN Cobra™ Street Light

Ordering Information

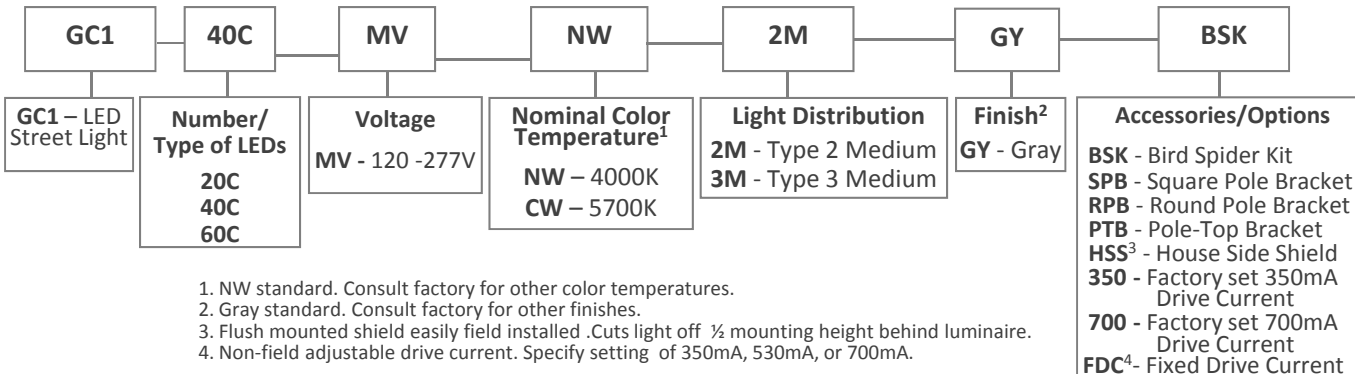

Luminaire Specifications

Housing: Die cast aluminum housing with universal four-bolt slip fitter mounts to 1 1/4" to 2" (1 5/8" to 2 3/8" O.D.) diameter mast arm. Cooling fins maintain LED junction temperature assuring long LED life and efficiency. Electrical components are accessed without tools and are mounted on removable power door. Power door features quick electrical disconnects to terminal block and LED board. Photocontrol receptacle is standard and can be aimed without tools. Photocontrol is provided by others.

Light Emitting Diodes: Hi-flux/Hi-power white LEDs produce a minimum of 70% of initial intensity at 50,000 hours of life. LEDs are tested in accordance with IESNA LM-80 testing procedures. They have a mean correlated color temperature of 4000K (standard). LEDs are 100% mercury and lead free.


Optical Systems: Micro-lens systems produce IESNA Type 2 and Type 3 distributions. Luminaire is classified as Full-Cutoff with 0% total lumens above 90°.

Electrical: Power supply features a minimum power factor of .90 and <20% Total Harmonic Distortion (THD). EMC meets or exceeds FCC CFR Part 15. Transient voltage complies with ANSI C62.41 Cat. A. Power supply is field adjustable to 350mA, 530mA, or 700mA drive current. Standard factory setting is 530mA. Integral surge protector is tested per ANSI/IEEE C62.45 procedures based on ANSI/IEEE C62.41.2 definitions for standard and optional waveforms for Location Category C-High.

Finish: Housing receives a fade and abrasion resistant, epoxy polyester powder coat, light gray finish standard.

Listings/Ratings/Warranties: Luminaires are listed by certified testing laboratory for use in wet locations in the United States and Canada. Optical systems maintain an IP67 rating. Five-year limited warranty is standard on all components.


Photometry: All luminaires are photometrically tested by certified independent testing laboratories in accordance with IESNA LM-79 testing procedures.

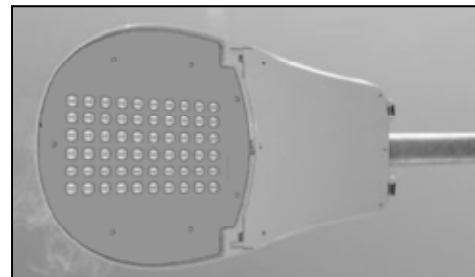

Traditional street light form transitions to mast arm and provides aesthetic continuity.



Removable "power door" opens without tools and hangs securely during wiring.

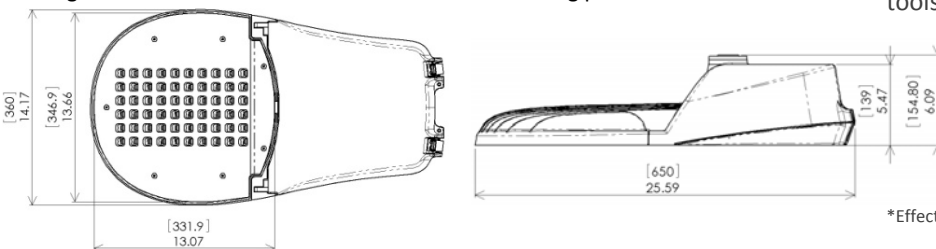

Weight	EPA*
21 lbs.	0.9ft ²

*Effective Projected Area (consult factory for multiple units)

LEOTEK USA
1330 Memorex Drive
Santa Clara, CA 95050
Toll Free: (888) 806-1188
Fax: (408) 980-0538

LEOTEK TAIWAN
No. 50 Lung-Yuan 7th Road
Lung-Tan, Tao-Yuan Hsien 325
Taiwan
Telephone: 866-3-4995939
Fax: 866-3-4995930

GREEN Technology
www.leotek.com
www.liteon.com

