



LED Signage Lighting Lite-Stik CL3 Series



The Leotek LED Advantage

Save on energy consumption and maintenance costs, with easy to install High-Flux LEDs that provide bright, uniform light distribution to illuminate your company's most important asset, your Brand Image.



Applications

Fluorescent and Neon Alternative for:

- Storefront Marquis Signs
- Cabinet Signs
- Pylon Signs
- Monument Signs
- Canopy Fascia
- Gas Pump Toppers
- ATM Surrounds




Features and Benefits

- Significant energy and maintenance savings.
- Life span up to 8 times greater than fluorescent tubes.
- Environmentally friendly.
- Reduces glare with sharper visual clarity.
- Three color options.
- No cold start issues.
- Reduced lamp and ballast maintenance.
- Enhanced life and performance.
- Shatterproof and shock resistant.
- Maintains a minimum of 70% of the initial lumen intensity after 50,000 hours of operation.
- 5-Year Limited Warranty

Technical Data

Power Consumption per Foot	7.5W	Operating Temperature:	-40°F to 122°F (-40°C to 50°C)
Lumen Output per Foot	380 cd	Storage Temperature:	-40°F to 185°F (-40°C to 85°C)
Input :	Constant Current Source	IP Rating:	IP65, Wet
CRI (Typical):	70	Weight per Foot:	0.7 lbs (0.34 kg)

Mechanical Dimensions [units: inch (mm)]

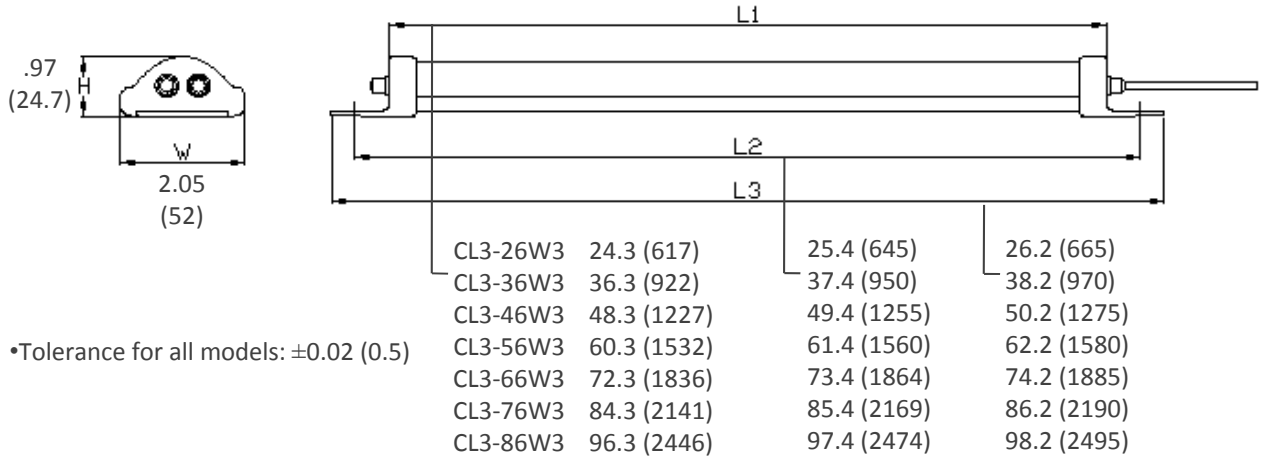

•Tolerance for all models: ±0.02 (0.5)

Ordering Options

Example CL3-66W3:



Strip Length (Lumen Output) [Power Consumption]{Required Driver Model No.}

- 8: 8 feet (3040)[60]{LP1090}
- 7: 7 feet (2660)[53]{LP1090}
- 6: 6 feet (2282)[45.4]{LP1090}
- 5: 5 feet (1902)[37.8]{LP1040}
- 4: 4 feet (1522)[30.2]{LP1040}
- 3: 3 feet (1141)[22.7]{LP1025}
- 2: 2 feet (781)[15.1]{LP1020}

LED Density

- 6: 6 LED/ft
- 5: 5 LED/ft
- 4: 4 LED/ft

Color

- W: cool white (5500K)
- N: neutral (4100K)
- L: warm white (3050K)

Driver

- 3: 110/220Vac